
Cod: MI33IPTVHA10L

Mira 65 | 5 W | Diffuse 120° | Floor recessed

Also available for wall recessed

Technical Specifications

Source lamp	LED 5 W
Total wattage	5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	21 lm (400 lm*) @ 3000 K
Luminous efficacy	4 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	Diffuse 120°
CRI	>80
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	II
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW






Materials


Body	Extruded aluminium EN AW6060
Diffuser	Opal polycarbonate
Finishing	Graphite - Polyester powder paint

All right reserved Landa illuminotecnica S.p.A. will reserve to change the specific note without any written notice

Isolux

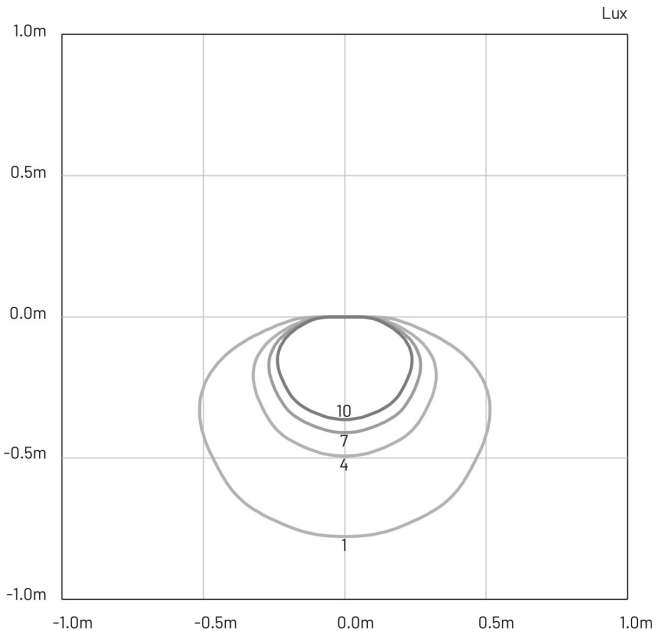

Photometry

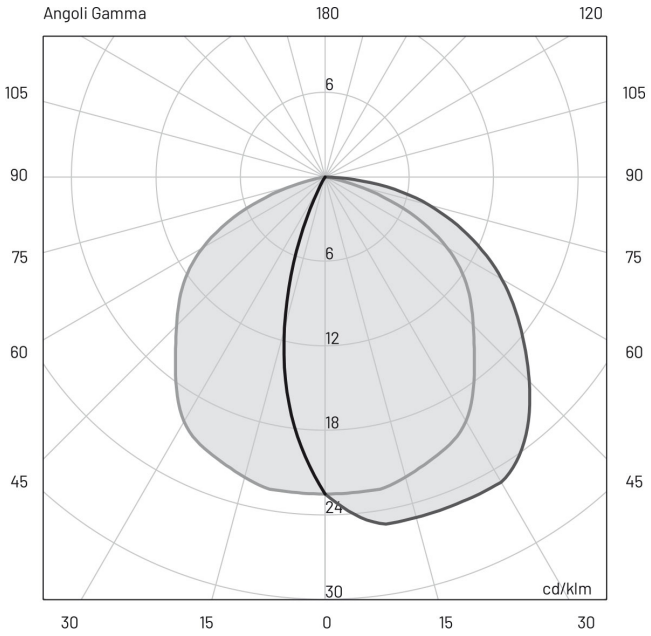

Included accessories

-	1 m length cable H05RN-F
-	Housing box

Available accessories

0404M009	Single connection IP68	

LANDA ILLUMINOTECNICA S.p.A. - Via Rosmini, 13/15 - 25065 Lumezzane – Brescia – Italy - T +39 030 892 0966 - F +39 030 892 1003 - www.landa.it - E info@landa.it - P.IVA IT00688140987 - CF 02125310173
All right reserved Landa illuminotecnica S.p.A. will reserve to change the specific note without any written notice