
Cod: KB80PROSHB10L

Kuboid 160 | 24 W | spot 14° | Projectors

Technical Specifications

Source lamp	LED 24 W
Total wattage	27
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	2506 lm (2700 lm*) @ 3000 K
Luminous efficacy	93 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	spot 14°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW





Materials


Body	Die-cast aluminium EN47100
Diffuser	Serigraphed transparent glass
Finishing	Graphite - Polyester powder paint

LANDA ILLUMINOTECNICA S.p.A. - Via Rosmini, 13/15 - 25065 Lumezzane – Brescia – Italy - T +39 030 892 0966 - F +39 030 892 1003 - www.landa.it - E info@landa.it - P.IVA IT00688140987 - CF 02125310173
All right reserved Landa illuminotecnica S.p.A. will reserve to change the specific note without any written notice

E (lux)

H (m)	lux @ 3000 K	Ø (m)
1.00	32120	0.23
2.00	8030	0.45
3.00	3569	0.68
4.00	2008	0.90
5.00	1285	1.13

Photometry

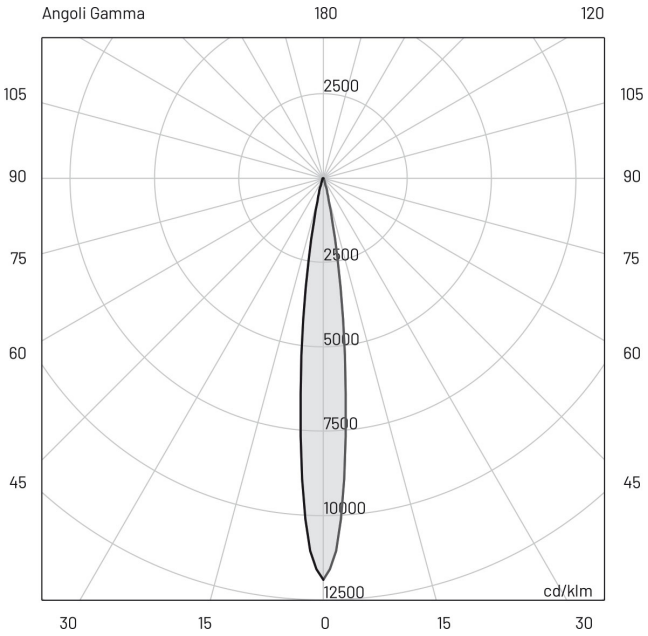

Available accessories

0404M010	Single connection IP68	
00AKB60-80	Steel fixing kit - spike	
00KVISKB80_	Visor (available in different colours)	

All right reserved Landa illuminotecnica S.p.A. will reserve to change the specific note without any written notice