


## Eye\_1 300 | 18 W | flood 45° | Projectors

Also available for ceiling

### Technical Specifications

Source lamp	LED 18 W
Total wattage	24
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	1657 lm (2200 lm*) @ 3000 K
Luminous efficacy	69 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	flood 45°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




### Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear glass
Finishing	Black - Polyester powder paint

E (lux)

H(m)	lux @ 3000 K	Ø (m)
1.00	2658	0.78
2.00	664	1.56
3.00	295	2.34
4.00	166	3.11
5.00	106	3.89

## Photometry

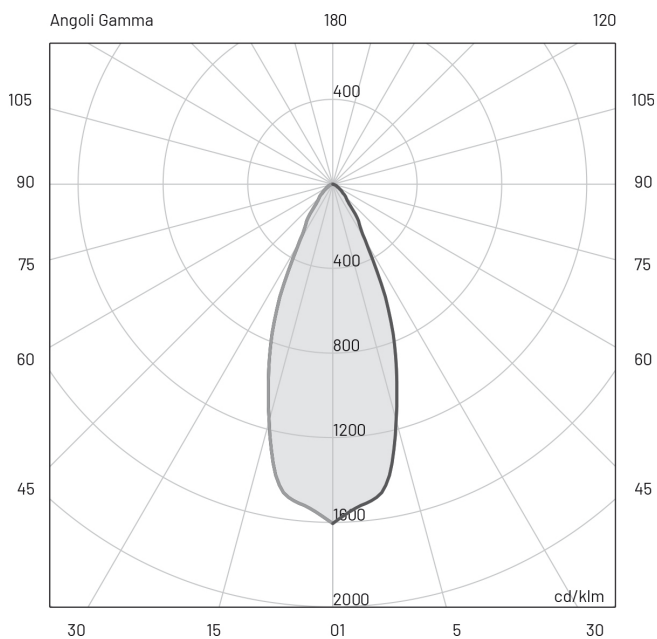

## Included accessories

- 1 m length cable -05RN-F
- Fixing kit short (7,5 cm)
- Single connection IP68

## Available accessories

00KEYFGL.250\_ Fixing kit long (25 cm)



00KEYFGL.150\_ Fixing kit medium (15 cm)

