


## Eye\_1 300 | 18 W | medium 30° | Projectors

Also available for ceiling

### Technical Specifications

Source lamp	LED 18 W
Total wattage	24
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	1783 lm (2200 lm*) @ 3000 K
Luminous efficacy	74 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	medium 30°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




### Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear glass
Finishing	Black - Polyester powder paint

E (lux)

H(m)	lux @ 3000 K	Ø (m)
1.00	4516	0.55
2.00	1129	1.11
3.00	500	1.66
4.00	282	2.22
5.00	181	2.77

## Photometry

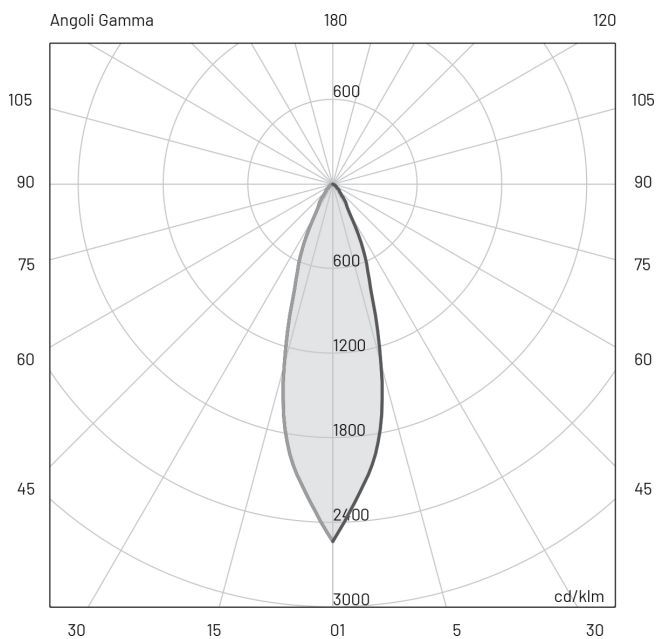

## Included accessories

-	1 m length cable -05RN-F
-	Fixing kit short (7,5 cm)
-	Single connection IP68

## Available accessories

00KEYFGL.250_	Fixing kit long (25 cm)	
00KEYFGL.150_	Fixing kit medium (15 cm)	