


Eye_1 300 | 18 W | spot 12° | Projectors

Also available for ceiling

Technical Specifications

Source lamp	LED 18 W
Total wattage	24
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	1741 lm (2200 lm*) @ 3000 K
Luminous efficacy	73 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	spot 12°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear glass
Finishing	Black - Polyester powder paint

E (lux)

H(m)	lux @ 3000 K	Ø(m)
1.00	17833	0.21
2.00	4458	0.42
3.00	1981	0.63
4.00	1115	0.84
5.00	713	1.04

Photometry

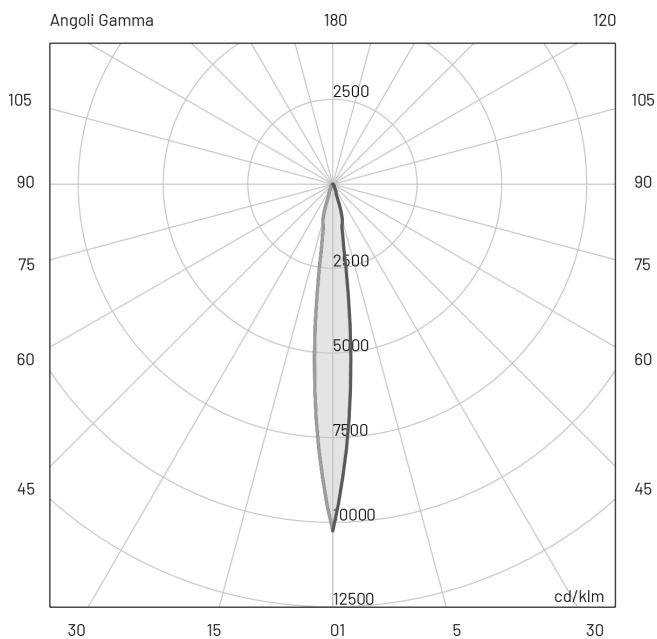

Included accessories

- 0.5 m length cable -05RN-F
- Fixing kit short (7,5 cm)
- Single connection IP68

Available accessories

00KEYFGL.250_ Fixing kit long (25 cm)



00KEYFGL.150_ Fixing kit medium (15 cm)

