


## Polos\_1 | 14 W | diffuse | Bollards

67 cm

## Technical Specifications


|                              |                                                                                                                    |
|------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Source lamp                  | LED 14 W                                                                                                           |
| Total wattage                | 16                                                                                                                 |
| Voltage                      | 220-240 Vac - 50/60 Hz                                                                                             |
| Control                      | On/Off (other controls on request)                                                                                 |
| Luminous flux (*Source flux) | 680 lm (1560 lm*) @ 3000 K                                                                                         |
| Luminous efficacy            | 42.5 lm/W @ 3000 K                                                                                                 |
| Light Temperature            | 3000 K                                                                                                             |
| McADAM steps                 | 3                                                                                                                  |
| Beam                         | diffuse                                                                                                            |
| CRI                          | >90                                                                                                                |
| Life time                    | L80-B15 > 60.000 h Ta 40°C                                                                                         |
| IP rating                    | 65                                                                                                                 |
| IK rating                    | 8                                                                                                                  |
| Insulation class             | I                                                                                                                  |
| Note                         | Control available on request: DALI - 1/10V -<br>DMX - TRIAC<br>Light control available on request: 2200K -<br>RGBW |

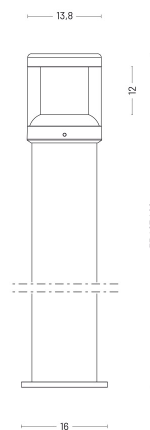


## Materials

|           |                                                             |
|-----------|-------------------------------------------------------------|
| Body      | Die-cast aluminium EN47100 and extruded aluminium EN AW6060 |
| Diffuser  | Extra clear polycarbonate                                   |
| Finishing | Graphite - Polyester powder paint                           |

## Isolux

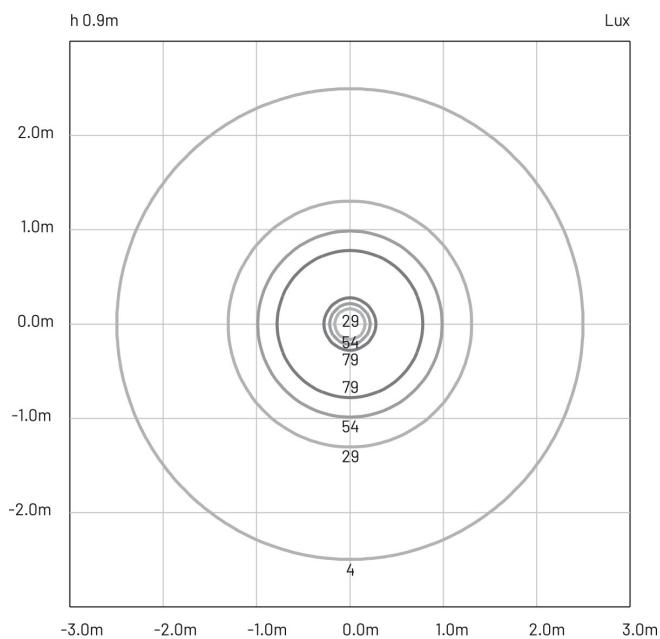

## Photometry

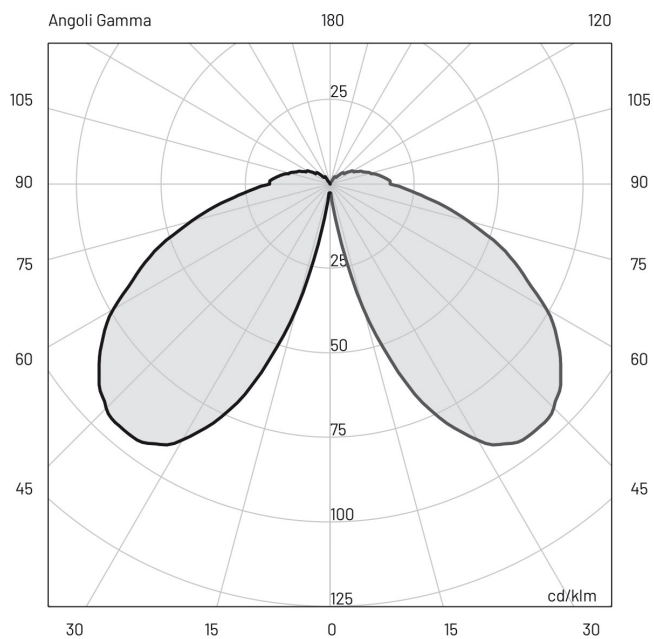

## Available accessories

|            |                       |
|------------|-----------------------|
| 00A405.01P | Anchor bolt           |
| 0404M003   | Loop-in loop-out IP68 |
| 00A405     | Root mounting kit     |