


Lako 140 | 16 W | double asymmetric | Wall lamps

Technical Specifications


Source lamp	LED 16 W
Total wattage	18.5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	530 lm (2050 lm*) @ 3000 K
Luminous efficacy	29 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	double asymmetric
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	10
Insulation class	I
Note	Control available on request: DALI - 1/10V - DMX - TRIAC Light control available on request: 2200K - 4000K - RGBW



Materials

Body	Die-cast aluminium EN47100
Diffuser	Opal polycarbonate
Finishing	Graphite - Polyester powder paint

Isolux

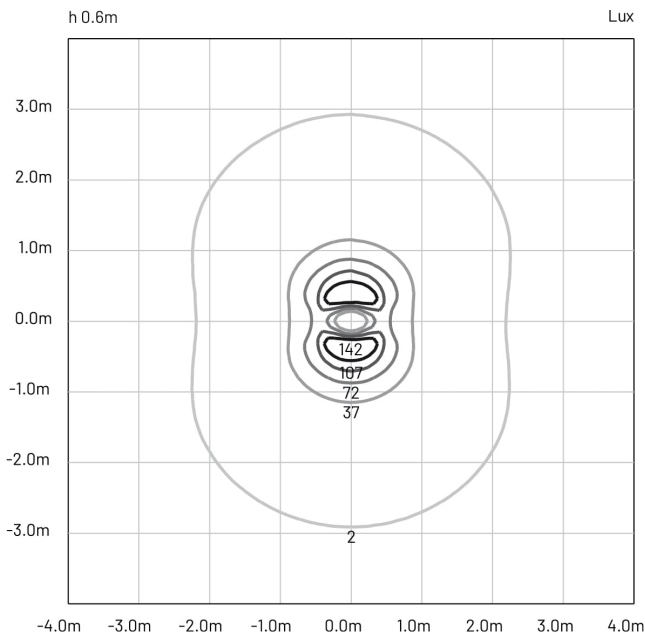

Photometry

