



## Car-Go 80 | 5 W | diffuse | Floor recessed

Drive over 2000 Kg | 20 km/h

### Technical Specifications

Source lamp	LED 5 W
Total wattage	5
Voltage	24 Vdc
Control	Power supply not included
Luminous flux (*Source flux)	155 lm (590 lm*) @ 3000 K
Luminous efficacy	31 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	III

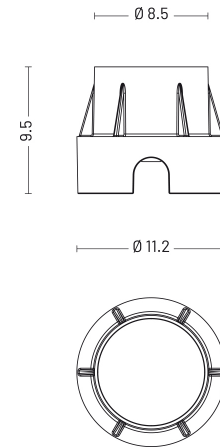


### Materials

Body	Extruded aluminium EN AW6026
Diffuser	Opal glass
Finishing	White - Glass

## E (lux)

H (m)	lux (3000 K)	Ø (m)
1.00	48	3.46
2.00	12	6.93
3.00	5	10.39
4.00	3	13.86
5.00	2	17.32

## Photometry

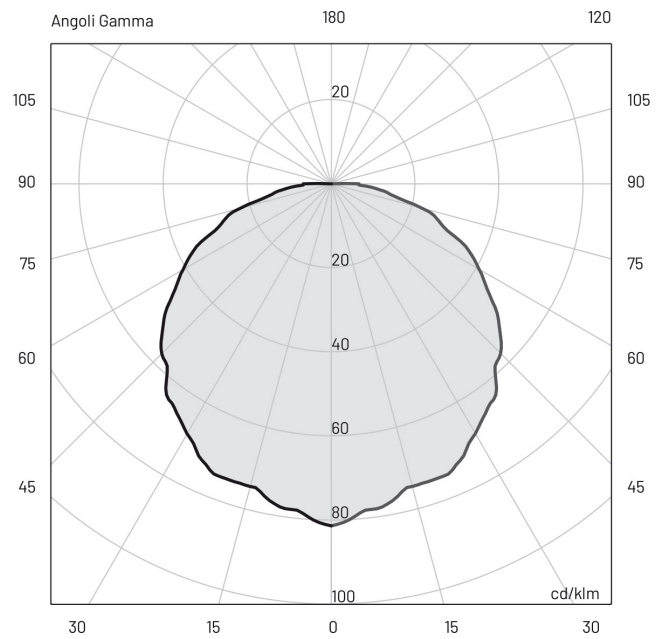

## Included accessories

- 1 m length cable -05RN-F
- Housing box

## Available accessories

<b>0303003</b>	Glass lifting suction pad
<b>00KCG.01</b>	Recessed box adjusting kit
<b>0404M011</b>	Single connection IP68
<b>0409M019</b>	Three-way connection box mini
<b>0409BT016</b>	Transformer _ 24 Vdc - 100 W
<b>0409BT014</b>	Transformer _ 24 Vdc - 12 W
<b>0409BT015</b>	Transformer _ 24 Vdc - 25 W