
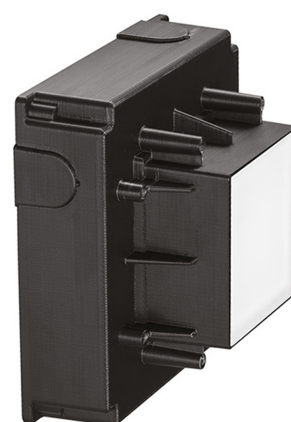


Fog_s 80 | 5.5 W | diffuse | Wall recessed

Also available for wall/ceiling and ceiling recessed

Technical Specifications


Source lamp	LED 5.5 W
Total wattage	5.5
Voltage	24 Vdc
Control	Power supply not included
Luminous flux (*Source flux)	205 lm (759 lm*) @ 3000 K
Luminous efficacy	37 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	III




Materials

Body	Die-cast aluminium EN47100
Diffuser	Opal glass
Finishing	White - Polyester powder paint

Isolux

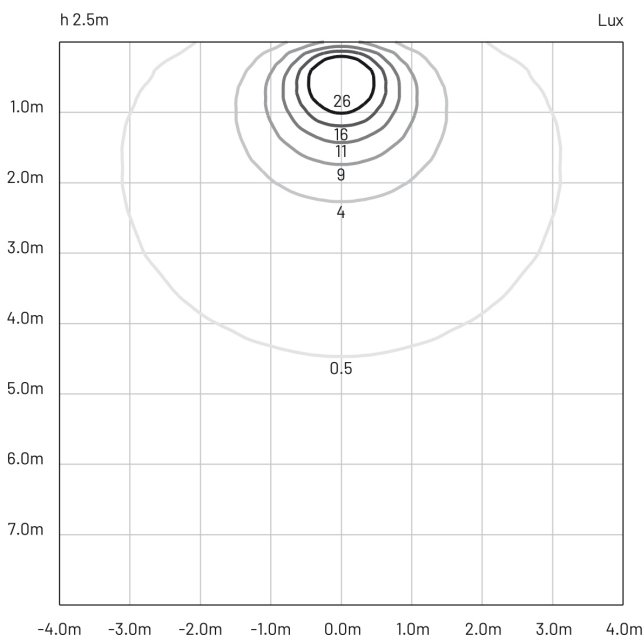

Photometry

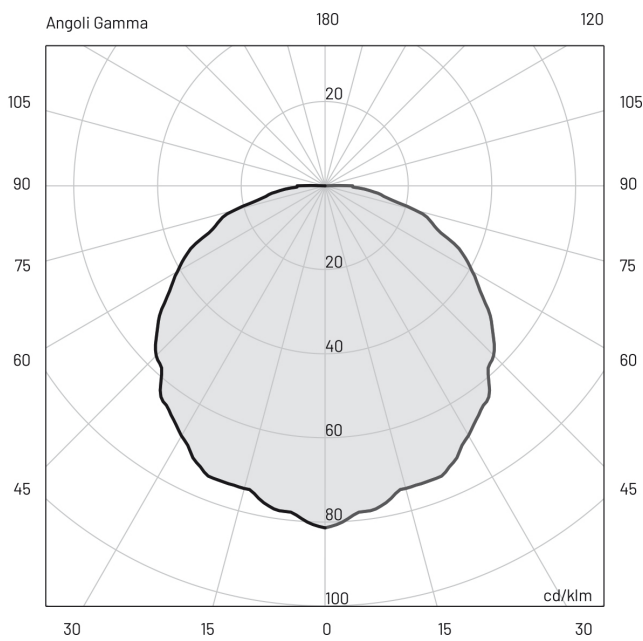

Included accessories

- 0.5 m length cable -05RN-F
- Housing box
- Single connection IP68

Available accessories

0303003	Glass lifting suction pad
0404M011	Single connection IP68
0404M019	Three-way connection box mini
0409BT016	Transformer _ 24 Vdc - 100 W (connect up to 20 pcs)
0409BT014	Transformer _ 24 Vdc - 12 W (connect up to 2 pcs)
0409BT015	Transformer _ 24 Vdc - 25 W (connect up to 5 pcs)