


## Eye\_1 900 | 54 W | medium 30° | Ceiling recessed

Ceiling and projector versions also available

### Technical Specifications

Source lamp	LED 54 W
Total wattage	60
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	4660 lm (5684 lm*) @ 3000 K
Luminous efficacy	78 lm/W @ 3000 K
McADAM steps	3
Beam	medium 30°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I




### Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear glass
Finishing	White - Polyester powder paint

E (lux)

H(m)	lux (3000 K)	Ø(m)
1.00	9033	0.55
2.00	2258	1.11
3.00	1004	1.66
4.00	565	2.22
5.00	360	2.77

Photometry

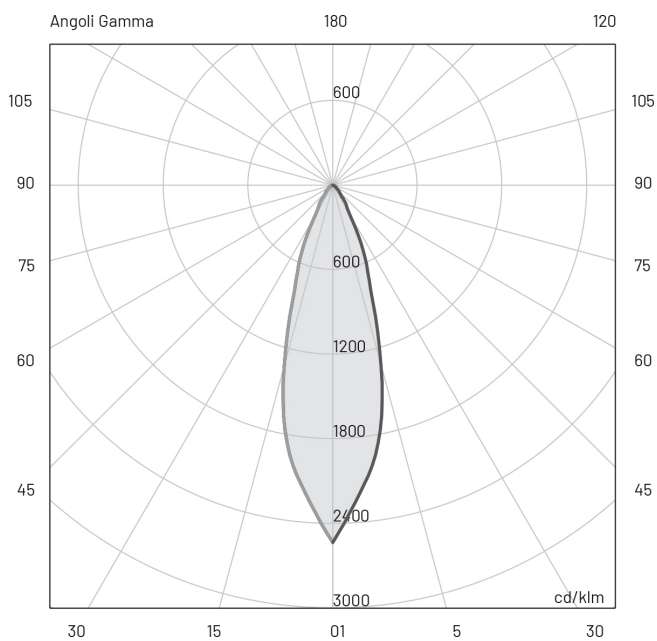

### Included accessories

- 0.5 m length cable -05RN-F
- Single connection IP68

### Available accessories

00EY/FGL9.STD

Housing box