


Eye_1 900 | 54 W | medium 30° | Ceiling recessed

Ceiling and projector versions also available

Technical Specifications

| | |
|------------------------------|------------------------------|
| Source lamp | LED 54 W |
| Total wattage | 60 |
| Voltage | 220-240 Vac - 50/60 Hz |
| Control | On/Off • dimmable on request |
| Luminous flux (*Source flux) | 4660 lm (5684 lm*) @ 3000 K |
| Luminous efficacy | 78 lm/W @ 3000 K |
| McADAM steps | 3 |
| Beam | medium 30° |
| CRI | >90 |
| Life time | L80-B15 > 60.000 h Ta 40°C |
| IP rating | 67 |
| IK rating | 10 |
| Insulation class | I |




Materials

| | |
|-----------|--------------------------------|
| Body | Extruded aluminium EN AW6060 |
| Diffuser | Extra clear glass |
| Finishing | White - Polyester powder paint |

E (lux)

| H(m) | lux (3000 K) | Ø(m) |
|------|--------------|------|
| 1.00 | 9033 | 0.55 |
| 2.00 | 2258 | 1.11 |
| 3.00 | 1004 | 1.66 |
| 4.00 | 565 | 2.22 |
| 5.00 | 360 | 2.77 |

Photometry

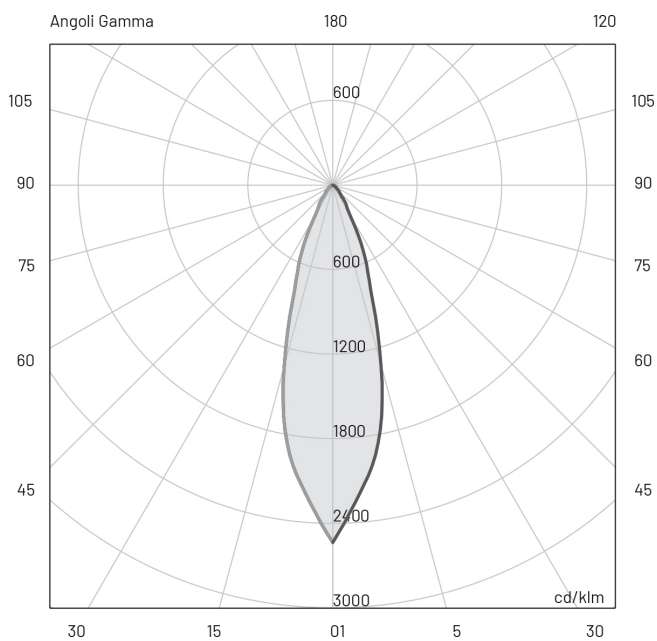

Included accessories

- 0.5 m length cable -05RN-F
- Single connection IP68

Available accessories

00EY/FGL9.STD

Housing box