

Duvali_mini | 1.5 W | diffuse | Bollards

35 cm

Technical Specifications


Source lamp	LED 1.5 W
Total wattage	1.5
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	135 lm (250 lm*) @ 3000 K
Luminous efficacy	44 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	III
Note	Control available on request: DALI - 1/10V - DMX - TRIAC Light control available on request: 2200K - RGBW




Materials

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® clear wood - Acetylation treatment

Isolux

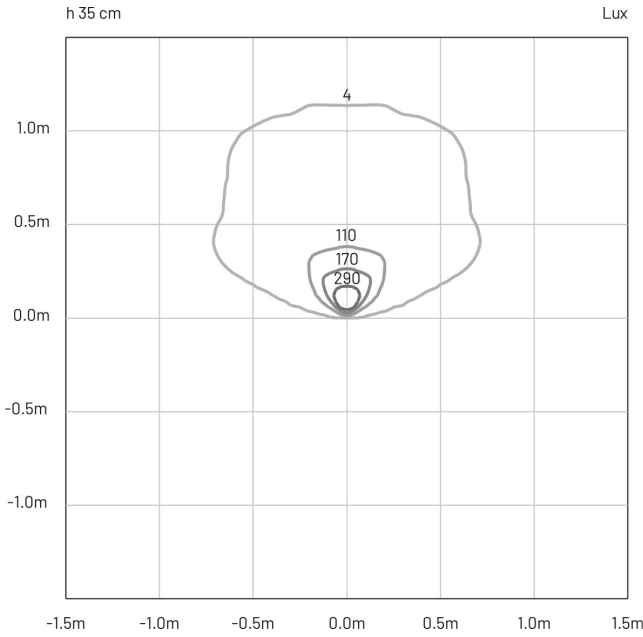

Photometry

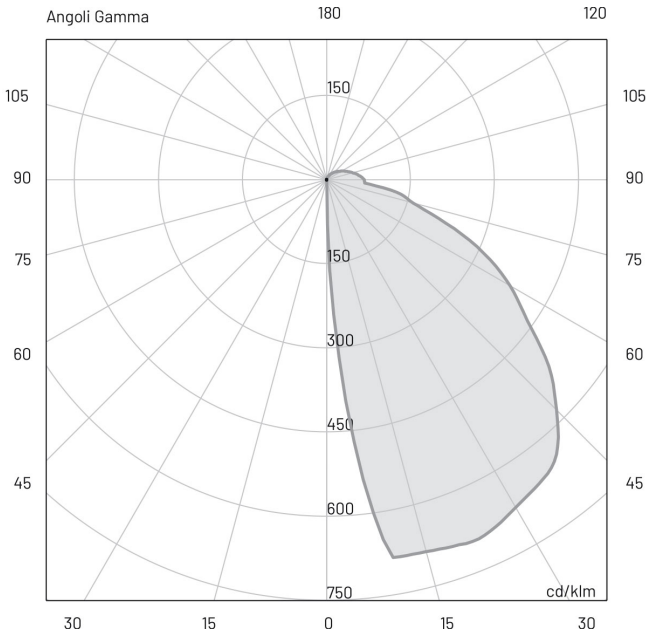

Included accessories

--	Root mounting kit
-	Single connection IP68

Available accessories

0409BT016	Transformer _ 24 Vdc - 100 W Connect up to 20 pcs
0409BT014	Transformer _ 24 Vdc - 12 W Connect up to 2 pcs
0409BT015	Trasnformer_24 Vdc - 24W