


## Solisia 130 | 8 W | diffuse | Bollards

55 cm

## Technical Specifications


|                              |                                                                                                                    |
|------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Source lamp                  | LED 8 W                                                                                                            |
| Total wattage                | 10                                                                                                                 |
| Voltage                      | 220-240 Vac - 50/60 Hz                                                                                             |
| Control                      | On/Off (other controls on request)                                                                                 |
| Luminous flux (*Source flux) | 470 lm (920 lm*) @ 3000 K                                                                                          |
| Luminous efficacy            | 59 lm/W @ 3000 K                                                                                                   |
| Light Temperature            | 3000 K                                                                                                             |
| McADAM steps                 | 3                                                                                                                  |
| Beam                         | diffuse                                                                                                            |
| CRI                          | >90                                                                                                                |
| Life time                    | L80-B15 > 60.000 h Ta 40°C                                                                                         |
| IP rating                    | 65                                                                                                                 |
| IK rating                    | 8                                                                                                                  |
| Insulation class             | III                                                                                                                |
| Note                         | Control available on request: DALI - 1/10V -<br>DMX - TRIAC<br>Light control available on request: 2200K -<br>RGBW |

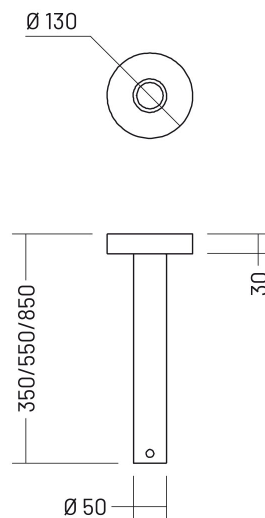


## Materials

|           |                                            |
|-----------|--------------------------------------------|
| Body      | Accoya® wood and inox AISI 316L            |
| Diffuser  | Opal polycarbonate                         |
| Finishing | Accoya® clear wood - Acetylation treatment |

Isolux

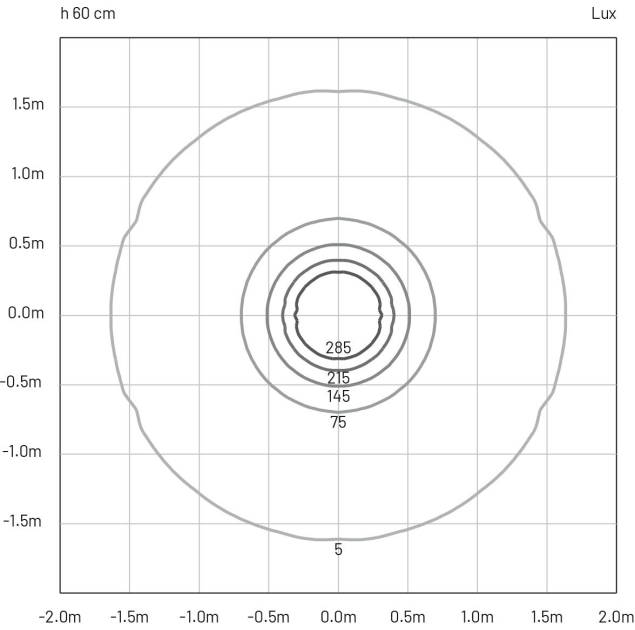

Photometry

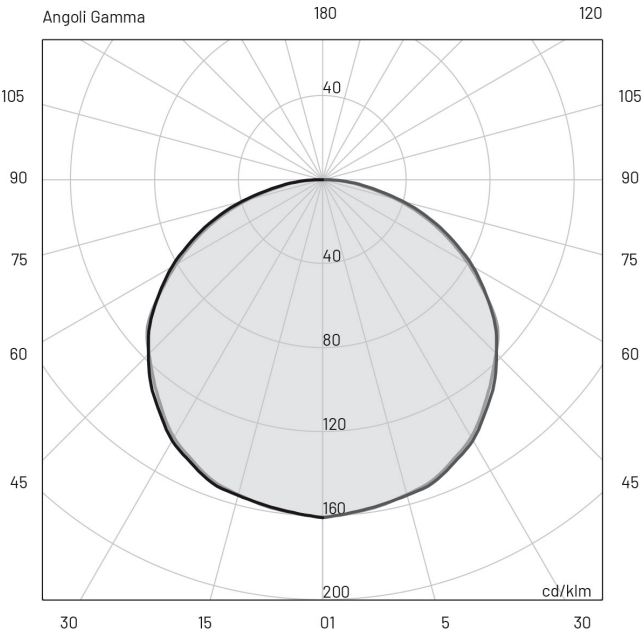

Included accessories

- Root mounting kit
- Single connection IP68