


## Kalan 900 | 12 W | diffuse (indirect) | Ceiling lamps

Also available for wall applications

## Technical Specifications


|                              |                                    |
|------------------------------|------------------------------------|
| Source lamp                  | LED 12 W                           |
| Total wattage                | 15                                 |
| Voltage                      | 220-240 Vac - 50/60 Hz             |
| Control                      | On/Off (other controls on request) |
| Luminous flux (*Source flux) | 320 lm (420 lm*) @ 3000 K          |
| Luminous efficacy            | 22 lm/W @ 3000 K                   |
| Light Temperature            | 3000 K                             |
| McADAM steps                 | 3                                  |
| Beam                         | diffuse (indirect)                 |
| CRI                          | >90                                |
| Life time                    | L80-B15 > 60.000 h Ta 40°C         |
| IP rating                    | 65                                 |
| IK rating                    | 8                                  |
| Insulation class             | II                                 |




## Materials

|           |                                            |
|-----------|--------------------------------------------|
| Body      | Accoya® wood and inox AISI 316L            |
| Diffuser  | Opal polycarbonate                         |
| Finishing | Accoya® clear wood - Acetylation treatment |

Isolux

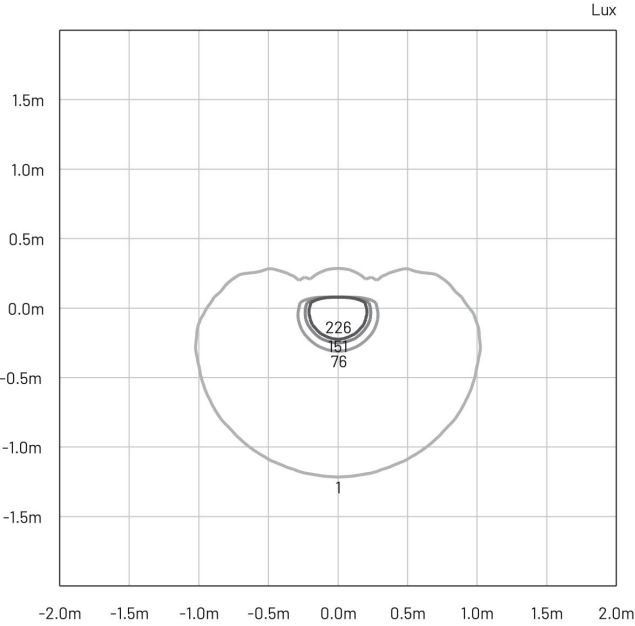

Photometry

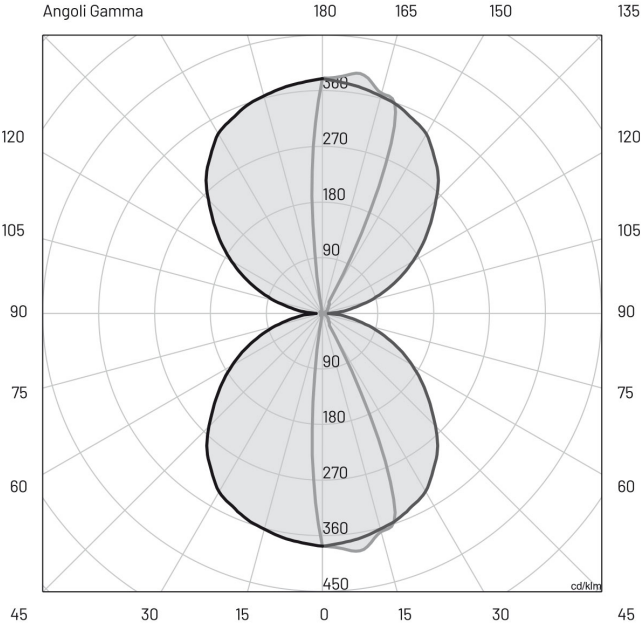

Included accessories

- Single connection IP68

Available accessories

|              |               |
|--------------|---------------|
| 00COVKL09.01 | Kalan cover 1 |
| 00COVKL09.02 | Kalan cover 2 |
| 00COVKL09.03 | Kalan cover 3 |
| 00COVKL09.04 | Kalan cover 4 |