


Kalan 1450 | 18 W | diffuse (indirect) | Ceiling lamps

Also available for wall applications

Technical Specifications


Source lamp	LED 18 W
Total wattage	20
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	476 lm (648 lm*) @ 3000 K
Luminous efficacy	24 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	diffuse (indirect)
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	II
Note	Control available on request: DALI - 1/10V - DMX - TRIAC Light control available on request: 2200K - RGBW




Materials

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® clear wood - Acetylation treatment

Isolux

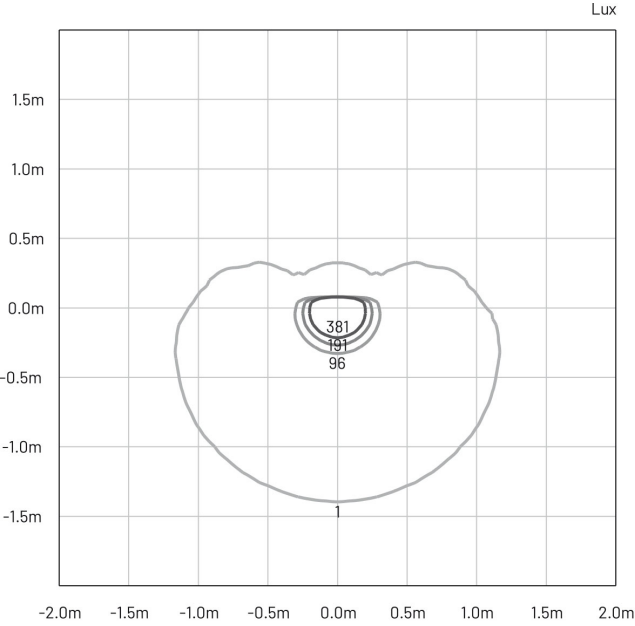

Photometry

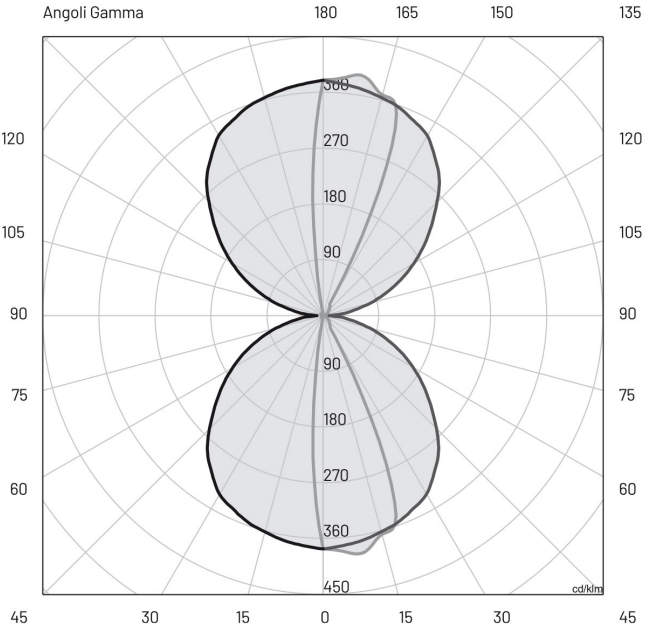

Included accessories

- Single connection IP68

Available accessories

00COVKL00.01	Kalan cover 1
00COVKL00.02	Kalan cover 2
00COVKL00.03	Kalan cover 3
00COVKL00.04	Kalan cover 4